


Diginnova Window Signage Display


Indoor & Outdoor Ceiling Mounted Dual - Sided Advertising Display
Perfect for Show Windows



Suitable For:

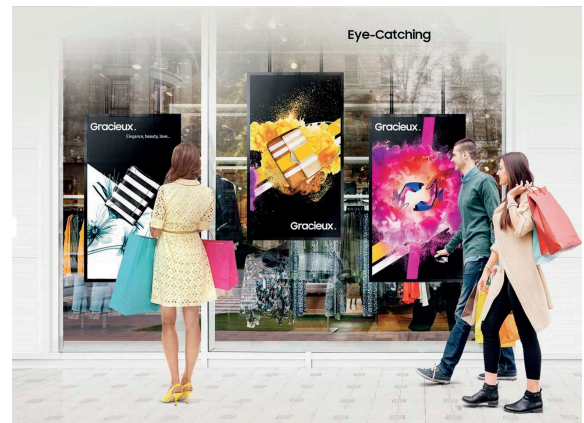

Product Highlights:

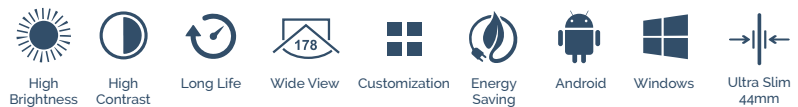

Key Features:

- Light weight - 15Kg only
- 24/7 easy operation
- Play verticle, horizontal & multiple window
- Update controls by USB, WiFi, LAN Cable
- CMS publishing design software
- Cloud CMS software optional

Advantages:

- High brightness 300/700 Nits / 700 - 3,000 Nits
- Double display back to back
- Full HD 1920x1080 & UHD 3840x1920
- Ultra slim design 44mm - 80mm
- Available in 37", 43", 47", 55"
- Play same or different content both sides

Technical Data:

Model	DI IWD 37D	DI IWD 43D	DI IWD 49D	DI IWD 55D
Display size (TFT LED)	37"	43"	49"	55"
Resolution	1920x1080 FHD / 3840x1920 UHD optional			
Chroma	97%			
Panel	Original Full New 100% A+ Grade Brand Panel			
Display Ratio	16:09			
Viewing Angle	178°/178°(H/V)			
Color	16.7M			
Response time	14.5 ms	12 ms		
Brightness (nits m2)	400/400 nits	700/700 or 1500/700 nits or 3000/700 Nits		
Contrast	1200:1	4000:1		
Speakers	8Ω 2W x 2			
Display Appearance (mm)	803x452	941x529	1073x604	1210x680
Life (Hrs)	50,000 Hrs			
Operating system Media Player				
Operating system	Android 5.1 / 7.1 / 8.1			
Processor	Cortex A17 1.8GHz Quad cores Arm, RK3288			
RAM	DDR3 2GB - 16GB			
ROM	eMMC flash 8GB, (16/32/64 GB optional)			
CMS Software Functions (Optional)				
Rolling subtitles	Display subtitles at any location of the screen with video or image playing.			
Power-off memory	Support replaying from the setting time before power failure			
Split screen	Support 1080P video, 1080P picture, video, subtitles and web page split screen function			
Software update	Remote update /USB updating			
Display mode	Support landscape & portrait display			
Play mode	Repeat all, single repeat, order play			
OSD	English, French, German, Italian, Polish, Russian, Simplified Chinese, Spanish, Turkish, Arabic, Japanese, Traditional Chinese etc			
Inputs				
WiFi	Yes			
LAN	Yes			
USB	Yes			
NAND	Yes			
Remote Server	Yes			
4G/3G	Optional			
Auto Standby	Automated on / off timing by hour, day, week			
File Support				
Video	H.264, MKV, WMV9, MPEG 1/2/4, HD Divx, Xvid, RM/RMVB			
Image	BMP/PNG/GIF/JPEG			
Audio	MP3, WMA, WAV, EAAC+, MP2 dec, Vorbis (Ogg), AC3, FLAC, APE, BSAC			
Scrolling	Text			
LAN	RJ45 Port, 10/100M Ethernet			
WiFi	Built-in WiFi 802.11B/G/N			
3G /4G (Optional)	WCDMA			
Power				
Power Consumption (watts)	60 W	160 W	165 W	180 W
Power Input	AC220/110V ± 10%, 50 / 60 HZ			
Operating Environment				
Operating Environment	Window, Indoor			
Operating Temperature	0°C ~ +40°C			
Operating Humidity	10°C ~ 80°C			
Operating Altitude(m)	≤ 2000			
Packing Dimensions				
Enclosure Material	Aluminum			
Glass Type	Acrylic			
Bazel width (mm)	12	50.5	50.5	52
Screen weight (kg)	14	15	18	25
Dimensions (mm)	470x1147x12	630 x 1210 x 22	704 x 1350 x 22	784 x 1500 x 22
Standard Accessories	Remote control Power supply 1x AC cable, User Manual & ceiling mounting bracket			