

OUTDOOR


**DIGINNOVA**  
Solutions Galore

## Diginnova Crystal S Transparent Series


High Transparency Glass Window Advertisement



### Suitable For:

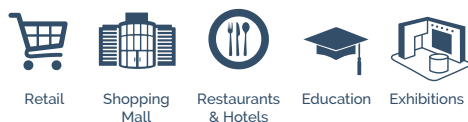

### Product Highlights:

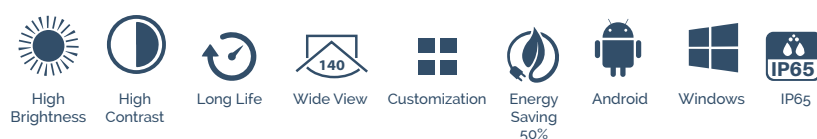

### Key Features:

- Ultra slim design
- 24/7 easy operation
- Aluminum Cabinet
- Front and rear maintenance
- High refresh rate

### Advantages:

- Slim PCB design allow high transparency
- Flexible cabinet sizes
- Easy and quick installation
- Rear/front acrylic cover for protection
- Up to 85% transparency



Wide viewing angle SMD



## Technical Data:

Model	Description	DI-OTR3.9S	DI-OTR5.2S	DI-OTR6.9S	DI-OTR10.4S	DI-OTR16.6S
Module	Pixel Size	P3.96X7.81	P5.2X7.8	P6.9X7.8	P10.4	P16.66
	Resolution	126x32	96x32	72x32	48x24	30x15
	Density (dot/m2)	32,256	24,576	18,432	9,216	3,600
	Horizontal Pixel Pitch	3.96mm	5.2mm	6.9mm	10.4mm	16.6mm
	Vertical Pixel Pitch	7.81mm	7.81mm	7.81mm	10.4mm	16.6mm
	SMD Type	SMD3512				
	Cabinet Size (mm)	1000X500 & 1000X1000				
Cabinet	Cabinet Material	Aluminium				
	Maintenance	Front & Rear				
	Avg Power Consumption	160 watts				
	Max Power Consumption	690W	670W	670W	670W	650W
	Viewing Angle	140° /140°				
	Cabinet Resolutions (dots)	256x96	192x92	192x96	128x80	96x64
	Weight (Kg/Panel)	6.5/13	6.5/13	6.5/13	6/11.5	6/11.5
Screen	Brightness	5500 Nits				
	Refresh Frequency	1920 Hz				
	Packing way	Plywood box Flight case (optional)				
	Transparency Rate	68%	71%	75%	82%	86%
	Input (v)	100-240V AC 50-60 Hz				
	Driving Mode	Constant Drive				
	Ingress Protection	IP 43				
	Grey Level	16 bit				
	Operating Humidity	10% - 90%				
	Operating Temperature	-20°C ~ 60°C				
Installation	Installation Types	Behind Glass floor standing or ceiling hanging				
Certification						