

INDOOR

DIGINNOVA
Solutions Galore

Diginnova MAXPAD

All-in-One LED Solution for Conference Room & Home Entertainment



Suitable For:



Product Highlights:



Key Features:

- Aluminium alloy material, plug & play
- Ultra slim and light weight
- Support wireless connection
- Sizes: 112, 135, 158, 180, 225 inches
- Pixel: 1.5, 1.6, 1.9, 2.6 mm

Advantages:

- Built-in media player - No PC required
- Network / cloud CMS software operation
- Remote video conference, AI recognition
- One screen supports multiple videos
- Join the conference, anytime anywhere
- Floor standing, wall, ceiling installation

Support Android system application installation

In order to meet the diverse needs of customers, you can download the Android version of the APP application.



Installation Method


Stacking installation Hanging installation



Control Method

Standard 232 control, Bluetooth, mouse, keyboard, USB, WIFI, infrared remote control

1 power line, 135-inch maximum
2.9KW/unit, average 1.5KW/unit

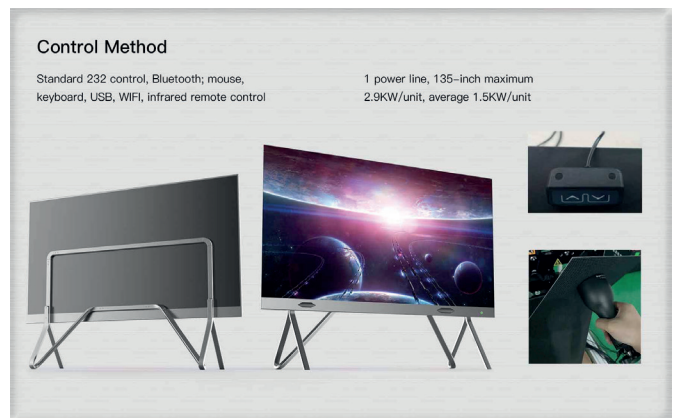

Technical Data:

Model No.	DI-AIO112	DI-AIO135	DI-AIO158	DI-AIO180	DI-AIO225
Screen size (m)	112"	135"	158"	180"	225"
Screen dimensions (mm)	2500x1406	3000x1687	3500x1968	4000x2250	5000x2810
Screen Area (M2)	3.515	5.0625	6.89	9.0	14.0625
Operating system	Android Latest Version				
Core Configuration	Quad Core CPU/Mali V811 (GPU)/3G memory/32G storage (expandable)				
Resolution	1600x900	1920x1080	1792x1008	2100x1176	1920x1080
Brightness	100-600 adjustable				
Refresh Rate	3840 hz				
Video interface	HDMIx2 (2.0) USB3.0 x1, USB 2.0x1				
Control Interface	232 control mouse, keyboard, U disk, Bluetooth, WIFI, interared remote				
Total screen size with frame	2515x1528	3015x1810	3515x2091	4015x2372	5015x2935
Screen cast	Yes				
Installation method	Floor standing, wall mounted & ceiling hanging installation				
Built in speaker	Yes				
Video conference system	Standard h323/sip protocol hardware conference terminal with camera tracking				
Mobile Podium stand	Optional				
Screen weight (kg)	74	106	145	177	195
Screen Life-span	≥100,000 hours				
Protection Grade	IP 30				
Power Supply Mode	AC220±10% 50Hz/AC110±10% 60Hz				
Environment Temperature	Temperature: 20 °C~+60 °C				
Humidity	Humidity: 10%-95% RH				
Control Mode	Synchronous display with control PC by DVI				
Control System	DVI video card + full color control card + fiber system(optional)				
Display Content	Video, DVD, VCD, TV, picture, cartoon, graphics, texts.etc.				
Interface	Standard Ethernet				
Transmission Distance	Multi mode fiber <500m, single mode fiber <30km,internet cable <100m				
Installation/maintenance	Magnet with front maintenance				

Images used are all for illustrative purpose only. The technical specification & product appearance may change based on actual product offered by the company. Terms & conditions apply.