

OUTDOOR

DIGINNOVA
Solutions Galore

Diginnova Platinum

Outdoor Fixed Advertising LED Display



Suitable For:



Retail



Shopping Mall



Restaurants & Hotels



Education



Exhibitions

Product Highlights:



High Brightness



High Contrast



Long Life



Wide View



Customization



Energy Saving
50%



Net Weight
50%




IP67

Key Features:

- High brightness; 10,000 Nits
- Aluminum module
- Cube screen achievable
- Total front & rear service
- Noise-free

Advantages:

- Low power consumption 50% approx
- Fully aluminium cabinet
- Lightweight cabinet only 25kg
- Stable & reliable performance
- Wireless module connectors

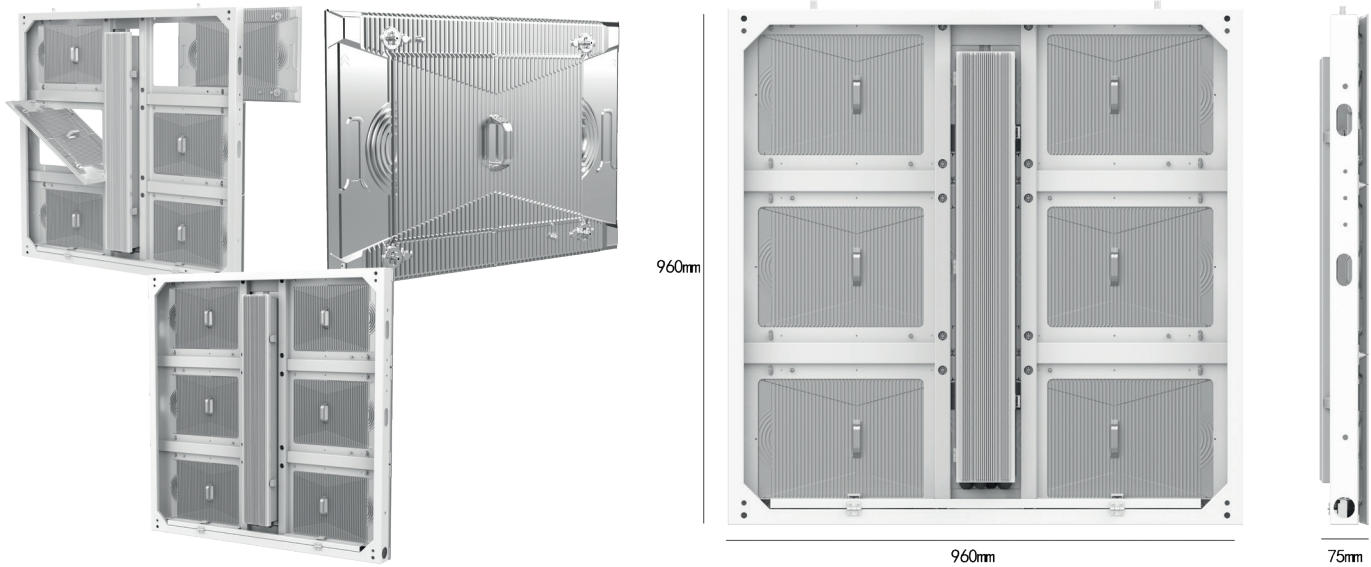

Technical Data:

Model No.	DI-OOP 6	DI-OOP 8	DI-OOP 10
Pixel Pitch	6.67mm	8mm	10mm
Pixel Density Pixels M2	22,500	15,625	10,000
LED Arrangement	SMD 2727	SMD 3535	SMD 3535
Module Resolution (Pixels)	72x48	60x40	48x32
Module Dimensions (mm)	480x320		
Cabinet Resolution (Pixels)	144x144	120x120	100x100
Brightness level (Nits)	7,000 - 10,000		
Refresh Rate	1920 - 3840 Hz		
Driving Mode	16	8	7
Grey Scale (bit)	≥14Bit	≥14Bit	≥14Bit
Contrast Ratio	8000:1	8000:1	8000:1
Frame Rate (Hz/sec)	60 Hz		
Max Power Consumption (Panel)	550 watts		
Ave Power Consumption	250 watts		
Visual View Angle	180° / 80°	180° / 90°	180° / 90°
Operating Power Source	100-240V AC 50-60 Hz		
Storage Temperature	-20°C ~ 50°C		
Operating Temperature	-20°C ~ 60°C		
Relative Humidity	≤95%		
Storage Humidity	≤45%		
Protecting Rating	IP 68/67		
Signal Input Source	S-Video, VGA, DVI, HDMI SDI		
MTBF (in hours)	10,000		
LED Lifetime (In Hours)	100,000		
Cabinet Dimensions (mm)	960x960x75mm		
Cabinet Weight (kg)	24kg M ²		
Cabinet Material	Almunium		
Service Access	Front/Rear		
Installation options	Wall, Floor & Ceiling hanging		
Certification	CE, ETL, FCC EMC		

Images used are all for illustrative purpose only. The technical specification & product appearance may change based on actual product offered by the company. Terms & conditions apply.