

OUTDOOR

DIGINNOVA
Solutions Galore

Diginnova Budget Series

Full Color Outdoor LED Display - Value for Money

Wall Mount



Suitable For:



Retail



Shopping
Mall



Restaurants
& Hotels



Education



Exhibitions

Product Highlights:



High
Brightness



High
Contrast



Long Life



Wide View



Customization



Energy
Saving




IP65

Key Features:

- High grey scale for deeper colors
- High refresh rate 1920 - 3840 Hz
- Various display sizes
- Total front service
- Noise-free

Advantages:

- Easy & quick installation
- Light weight structure
- Solid wall / Wooden wall
- Customized based on requirement
- Pixel pitch: 5.0, 6.0, 6.7 mm

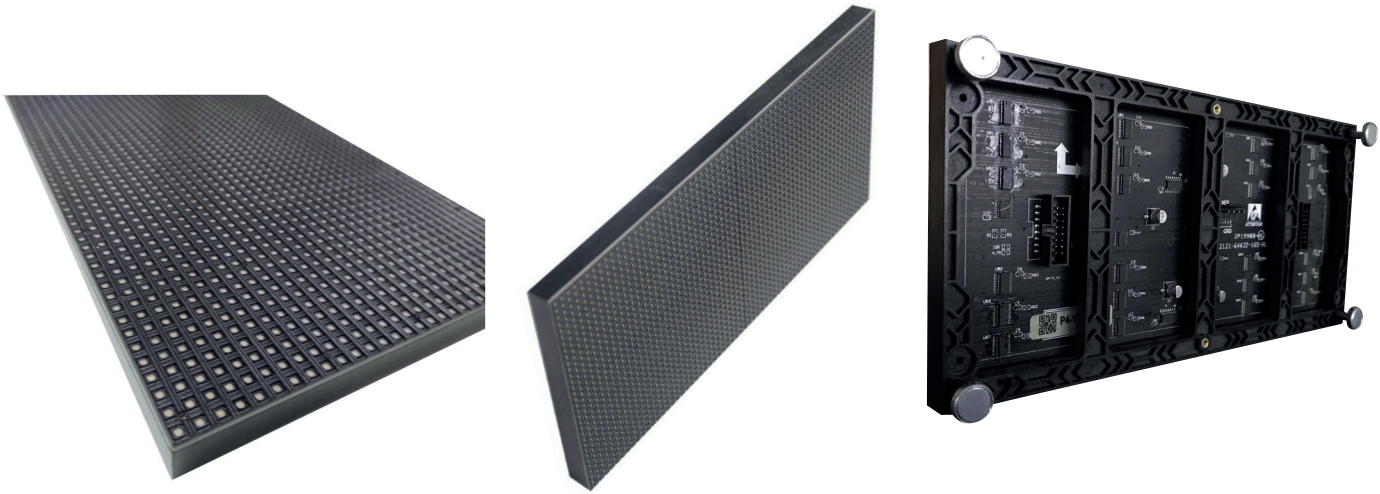

Technical Data:

Model No.	DIGI 2.5X	DIGI 3.0X	DIGI 4.0X	DIGI 5.0X	DIGI 6.0X	DIGI 6.67X
Pixel Pitch(mm)	2.5mm	3mm	4mm	5mm	6mm	6.67mm
LED type	SMD2121/2525/2727/3535					
LED Lamp	Nationstar/Epistar/Kinglight copper & Gold (optional)					
Pixel Density(px/m2)	160000	105625	62500	40000	27777	22500
Viewing distance(m)	≥2.5	≥3.0	≥4	≥5	≥6	≥7
H*V viewing	140/140					
brightness(cd/m2)	4000-5000					1000
brightness contol	Adjustable through controller or auto sensors.					
Refresh Rate(Hz)	High refresh rates, flicker free 1920-3840					
Module Resolution(px)	128x64	108x64	80x40	64x32	32x32	48x32
Module type	Magnetic, front access					
Module Size(mm)	320x160					
Module Weight(kg)	0.5					
Grey Scale(bit)	14-16					
Waterproof Level	IP65					
Power consumption (Ave/Max m2)	Low power consumption avg 350w/650W					
Working Voltage	AC 100v-240 V50/60Hz					
Operating -Temp()	20°C ~+ 60°C					
Storage Temp()	25°C ~+ 60°C					
Humidity Range	10%-90%					
working envoirement	Outdoor display					
Life time(hour)	100,000 Hrs					
Signal Transmission Distance(m)	CAT5 cable:< 100 m; Single mode fiber:< 10 km					
Application	Retail, boutique, hypermarket, Hospitals, shopping malls meeting & CCTV Room, restaurents and hotel industry					
installation type	Wall mount/ceiling hanging/Pillar mountable & floor standing solution					
installation advantages	No structure required, can be installed directly on MDF board, concreate wall, ceiling hanging, etc					
Control system	Dual system synchronous/ asynchronous					
Maintenance	Easy maintenance, Fully front service					

Images used are all for illustrative purpose only. The technical specification & product appearance may change based on actual product offered by the company. Terms & conditions apply.